



**MANUFACTURERS OF QUALITY
SPORT AND INDUSTRIAL NETS
SINCE 1934**


CARRON NET COMPANY, INC.

Post Office Box 177
Two Rivers, Wisconsin 54241-0177
Phone 920-793-2217 • Fax 920-793-2122
1-800-558-7768 • sales@carronnet.com
www.carronnet.com

CAGE NET INSTALLATION UNIT STEEL CABLE & HARDWARE KIT STOCK #61507

This kit is designed to suspend your baseball or golf cage net between two walls. Included are: 3 cables each 100 feet long, 3 turnbuckles to tighten cables, 12 cable clamps to form loops in the ends of cables, 6 thimbles to reinforce loops in ends of cables and 75 snap hooks to suspend net from cables.

FIGURE 1 shows how to position the three cables to support your net.

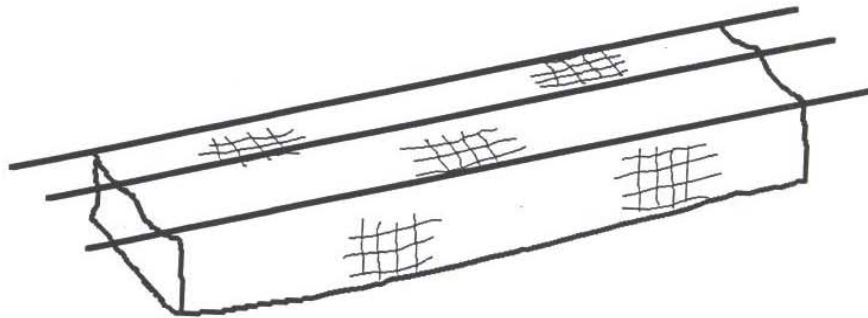

Wall hooks are installed at the time many gymnasiums are built so they are not included with this kit. Wall hooks are needed for three cables. It is suggested the center cable be positioned about one foot higher than the outside two cables. This will help keep the ceiling part of your net up high.

FIGURE 2 shows how cables attach to your wall hooks. A turnbuckle is used at one end of each cable as the other end is attached to the hook. Cut off any excess cable. Tighten turnbuckles to eliminate as much of the sag in the cables as possible. Evenly space 25 snap hooks on each cable to suspend the net. Any kind of string tie cord can be used to pull the net toward the walls to extend it to its full length.

CAUTION - Allow at least four feet between cage net and walls. Spectators must stand far away from net when in use for safety. Wall hooks or eyebolts must be mounted firmly in wall to support the tension of cables.

