



CARRON NET COMPANY, INC.

Post Office Box 177
 Two Rivers, Wisconsin 54241-0177
 Phone 920-793-2217 • Fax 920-793-2122
 1-800-558-7768 • sales@carronnet.com
 www.carronnet.com


CAGE NET INSTALLATION UNIT STEEL CABLE & HARDWARE KIT STOCK #61507

This kit is designed to suspend your baseball or golf cage net between two walls.

KIT INCLUDES:

- | | |
|-----------------|-----------------|
| (3) 100' cables | (12) clamps |
| (3) turnbuckles | (75) snap hooks |
| (6) thimbles | |

FIGURE 1 shows how to position the three cables to support your net.

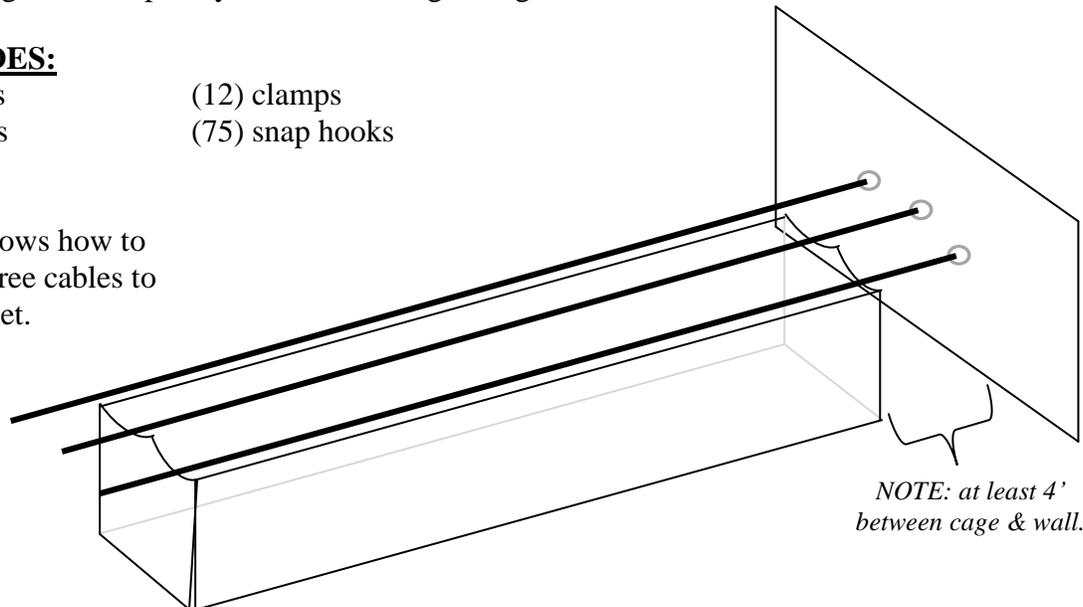

Wall hooks are often installed at the time many gymnasiums are built so they are not included with this kit. A total of six wall hooks or eyebolts are needed for three suspension cables. It is suggested that the center cable be positioned about one foot higher than the outside two cables. This will help keep the ceiling part of your net higher in the center.

FIGURE 2 shows how the cables attach to your wall hooks. A turnbuckle is used at one end of each cable and the other end is attached directly to the hook. Cut off any excess cable. Tighten the turnbuckles to eliminate as much of the sag in the cables as possible. Evenly space 25 snap hooks on each cable to suspend the net. Any kind of string tie cord can be used to pull the net toward the walls to extend it to its full length.

CAUTION – Allow at least four feet between the cage net and walls/supports. Spectators must stand away from the net when in use for safety,. Wall hooks or eyebolts must be mounted firmly into the wall to support the tension of the cables.

